




AMERICAN SPECIALTIES, INC.
441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

| | |
|-----------|------|
| MODEL No: | 0348 |
| ISSUED: | 1-87 |
| REVISED: | 9-96 |

SURFACE MOUNTED POWDER SOAP DISPENSER

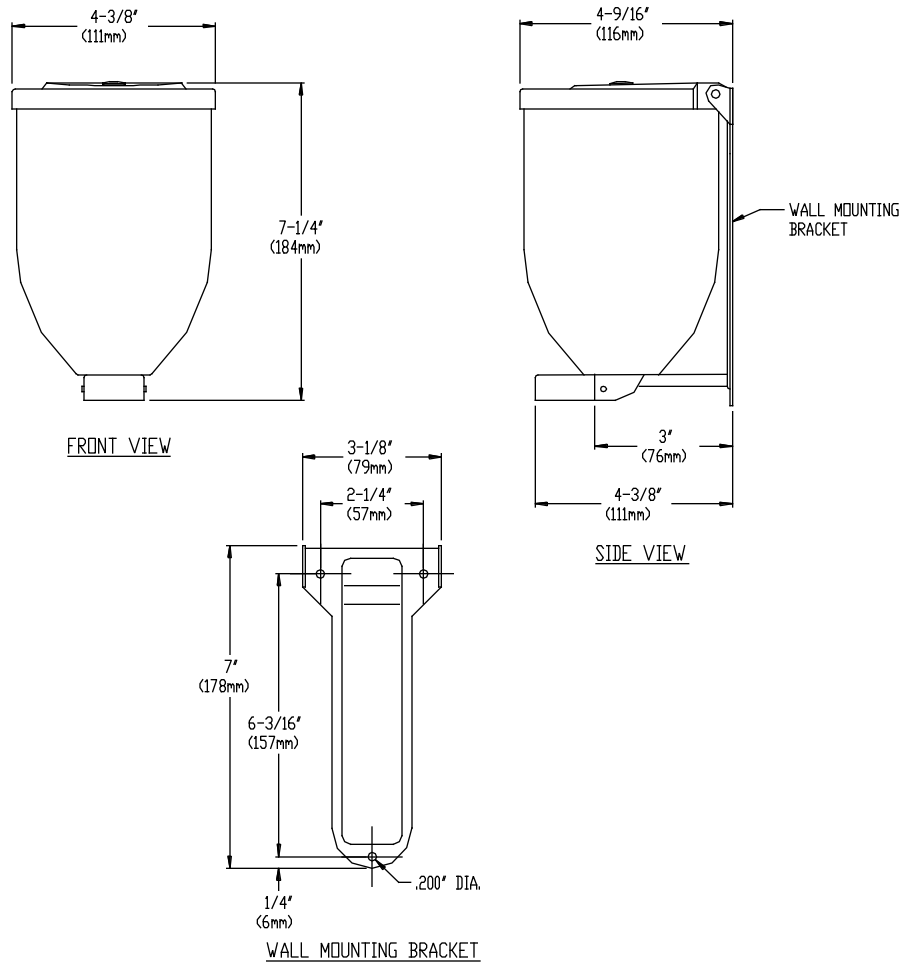

SPECIFICATION

Surface Mounted Powder Soap Dispenser shall hold and dispense up to 32 oz (.94 liter) of powdered, granular soap. Dispenser shall be fabricated of alloy 18-8 stainless steel, type 304, N^o 20 gauge. All exposed surfaces shall be N^o 4 satin finish. Lever operation shall comply with ADA Accessibility Guidelines by requiring no more than 5 lbs_f (22.2 Newtons) pressure to actuate and require no grasping or twisting by operator.

Surface Mounted Powder Soap Dispenser shall be Model N^o 0348 as fabricated by American Specialties, Inc. 441 Saw Mill River Road Yonkers, New York 10701-4913

INSTALLATION

Unit is surface mounted to wall or partition using N^o10 self tapping screws (supplied) through holes provided in attached bracket. For maximum usability and compliance with ADA Accessibility Guidelines, unit should be installed so that bottom of unit is 54" (1372mm) max. above finished floor (AFF) when clear floor side reach access is provided or 48" (1219mm) max. AFF if clear floor forward reach access is provided or 46" (1168mm) max. AFF if side reach over an obstruction only is provided (ie: vanity). Recommended installation for general utility is 42" (1066 mm) AFF or 6" (152 mm) minimum above wash basin.

OPERATION

Depressing lever causes entire unit to rock back and forth and powdered soap to be dispensed. Unit is reloaded through the top by unlocking cover. Soap will continue to feed properly until empty. Tank supply is replenished manually on cycle determined by maintenance needs.

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS INC.