



AMERICAN SPECIALTIES, INC.


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No: 0458 Series

ISSUED: 1-87

REVISED: 7-99

SEMI-RECESSED WASTE RECEPTACLE (pg 1 of 2)

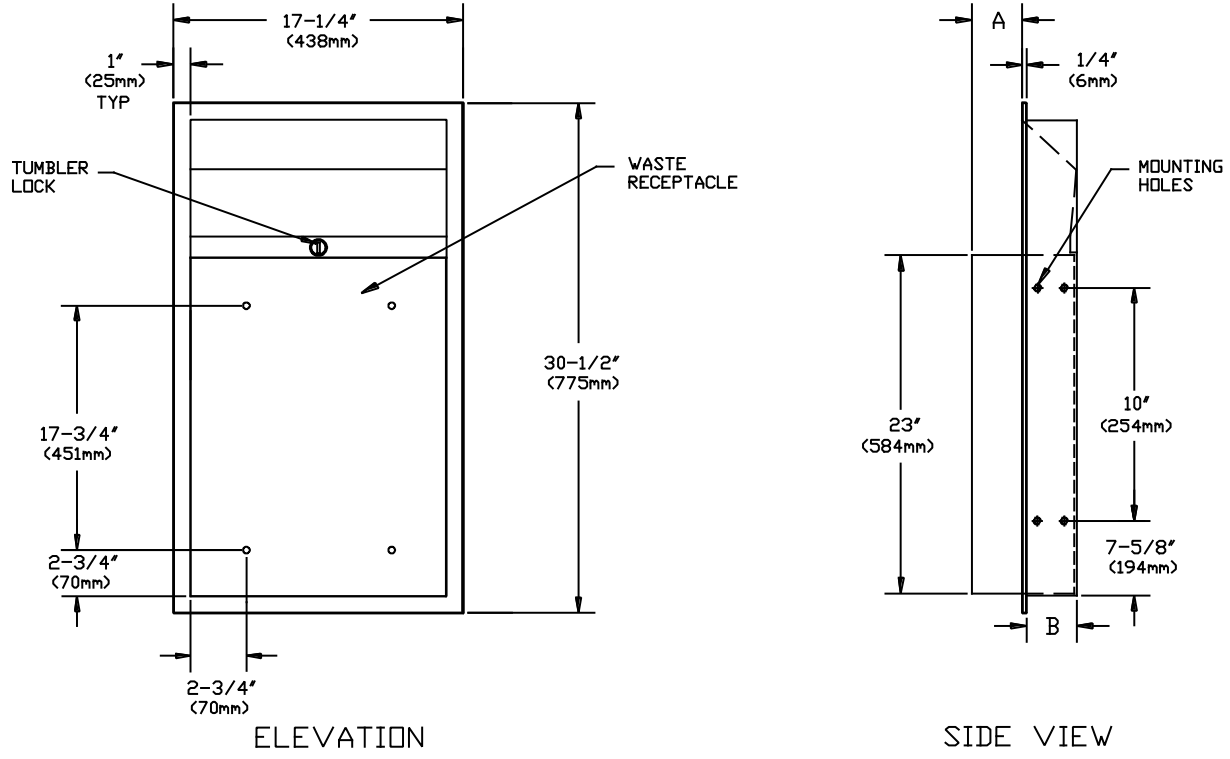

SPECIFICATION

Semi-Recessed Waste Receptacle shall have a waste capacity of 12 gal (46 litres), or 18 gal (68 litres) depending upon option chosen (see chart). Frame, waste container and cabinet shall be fabricated of alloy 18-8 stainless steel, type 304, N^o22 gauge. Waste container shall have hemmed edges for safety and shall be retained by a tumbler lock keyed alike to other ASI Washroom Equipment. Face trim shall be 1" (25.4mm) wide formed from one piece with no mitres, welding or open seams and have 1/4" (6.35mm) square return to wall. Structural assembly of all components shall be of welded construction. All exposed surfaces shall be N^o 4 satin finish and be protected during shipment with a PVC film easily removable after installation.

Semi-Recessed Waste Receptacle shall be Model N^o 0458 (fill in size code) as manufactured by American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

SCHEDULE

MODEL	A=Projection	B=Unit Depth	CAPACITY	RWO - DEPTH
0458	4" (102mm)	4" (102mm)	12 gals. (46 liters)	4-1/4" (108mm)
0458-A	6" (152mm)	2" (51mm)		2-1/4" (57mm)
0458-CX	1/2" (13mm)	7-1/2" (191mm)		7-3/4" (197mm)
0458-X	4" (102mm)	8" (203mm)	18 gals (68 liters)	8-1/4" (209mm)
0458AX	6" (152mm)	6" (152mm)		6-1/4" (158mm)
0458-DX	8" (203mm)	4" (102mm)		4-1/4" (108mm)

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS INC.



AMERICAN SPECIALTIES, INC.

441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No: 0458 Series

ISSUED: 1-87

REVISED: 7-99

SEMI-RECESSED WASTE RECEPTACLE (pg 2 of 2)

INSTALLATION

Unit is mounted in wall recess using №10 self tapping screws (supplied) through concealed mounting holes provided. For compliance with ADA Accessibility Guidelines, unit should be installed so that waste receptacle rim is 54" (1372mm) maximum above finished floor (AFF) if clear floor side reach access is provided or 48" (1219mm) maximum AFF if clear floor forward reach access only is provided. Note that top of RWO is 3/4" (19mm) below top of unit. Typical suggested mounting elevation is bottom of RWO 16-3/4" (426mm) AFF.

Rough Wall Opening (RWO) required is.... 15-3/4"W x 29"H x Depth (see schedule) (400mm x 737mm x.....)

OPERATION

Waste container is emptied manually on cycle determined by maintenance requirements. Keyed tumbler lock prevents unauthorized removal.