



AMERICAN SPECIALTIES, INC.


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No: 0810-0811

ISSUED: 1-87

REVISED: 3-99

STAINLESS STEEL FREE STANDING WASTE RECEPTACLE

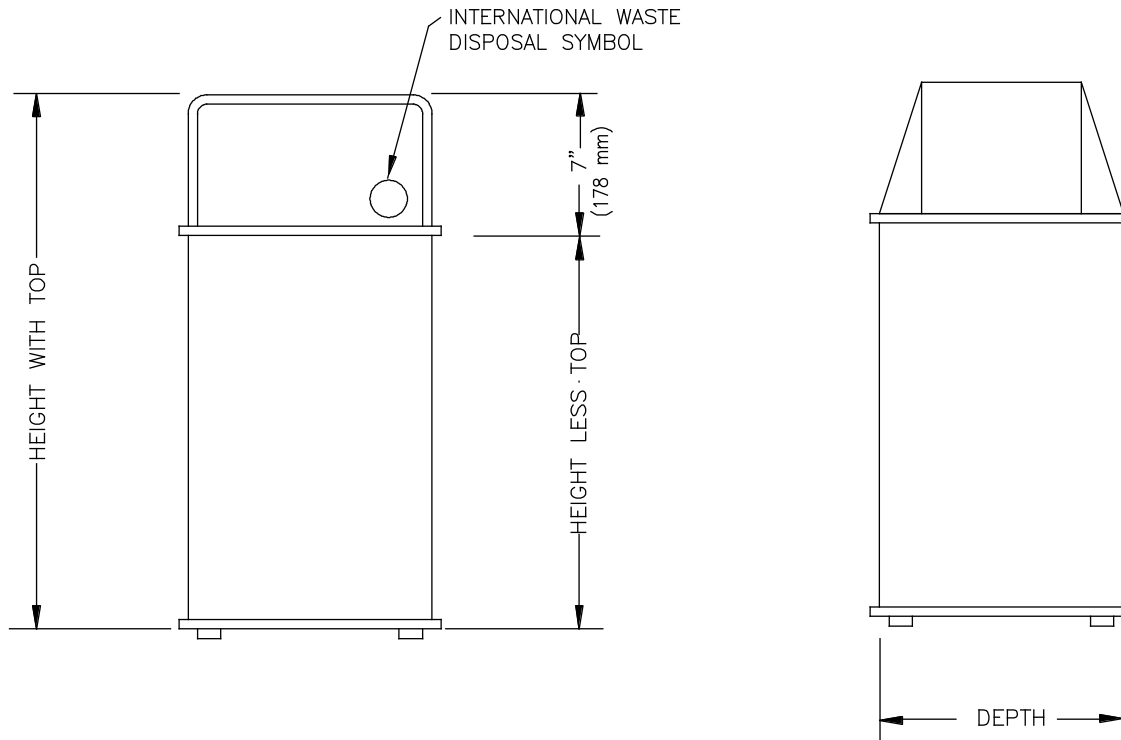

SPECIFICATION

Stainless Steel Free Standing Waste Receptacle shall have a capacity of 13 gals (49 liters). Unit shall be fabricated of alloy 18-8 stainless steel, type 304, №22 gauge with №4 satin finish and be protected during shipment with a PVC film easily removable after installation. Receptacle shall have no exposed fastening devices or spot welded seams. Receptacle shall have two continuous vinyl wall protectors, top and bottom, around entire perimeter. Unit shall have hooks for interior liners. Top shall be removable for easy maintenance and have two swing doors hung on heavy duty spring loaded stainless steel multi-staked piano hinges to return doors to closed position. Bottom of receptacle shall be equipped with four (4) non-removable rubber supports. Each door shall have the international waste symbol affixed to it. Receptacle shall be supplied with or without top as per schedule and model specified.

Stainless Steel Free Standing Waste Receptacle, with Swing-Top or Open Top, shall be Model № 0810 or 0811 as fabricated by American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913.

Schedule				
Model №	Height	Depth	Capacity	Configuration
0810	29" (737mm)	13"(330mm)	13 gals (49 liters)	with top
0811	22" (559mm)	13"(330mm)	13 gals (49 liters)	without top

INSTALLATION

Waste receptacle is free standing and should be placed in appropriate position on finished floor.

OPERATION

Waste material is deposited into the receptacle through opening or through the push in doors if top is provided. Use of a disposable trash liner bag is recommended. The disposal bag is emptied of waste material by disengaging the bag from the hooks on a cycle determined by maintenance needs.

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS INC.