



AMERICAN SPECIALTIES, INC.


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No: 0952

ISSUED: 1-87

REVISED: 6-98

RECESSED STAINLESS STEEL MEDICINE CABINET WITH MIRROR SWING-DOOR

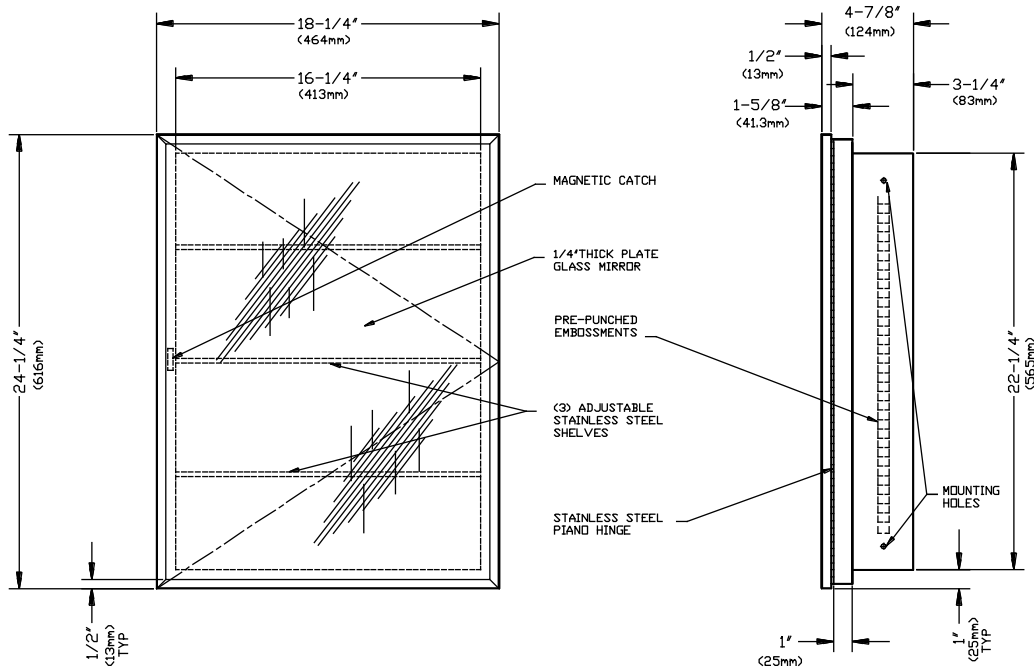

SPECIFICATION

Recessed Stainless Steel Medicine Cabinet with Mirror Swing-Door shall have door channel frame and cabinet fabricated of alloy 18-8 stainless steel, type 304, N^o22 gauge. All exposed surfaces shall be N^o 4 satin finish and be protected during shipment with a PVC film easily removable after installation. Interior face trim shall be of one-piece construction with hairline miters and no exposed fasteners or welding seams. Mirror shall be 1/4" (6.4mm) thick N^o 1 quality polished float/plate glass and shall have a warranty against silver spoilage of fifteen (15) years. Door channel-frame shall be attached to cabinet with a full-length, heavy-duty 3/16" dia stainless steel multi-staked piano hinge and shall be held closed with a magnetic catch and shall be prevented from over-swing by the self limiting 90° construction of the door and hinge. Structural assembly of cabinet and door components shall be of welded construction. Cabinet interior shall receive (3) adjustable stainless steel shelves fabricated from same grade as above and shall be provided.

Recessed Stainless Steel Medicine Cabinet with Mirror Swing-Door shall be Model N^o 0952 as fabricated by American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

INSTALLATION

Unit is mounted in wall recess using four (4) N^o10 self tapping screws (supplied) through concealed mounting holes provided in cabinet sides. For maximum usability typical mounting height is 46" (1168mm) from bottom of mirror door above finished floor (AFF) or 12" (305mm) above lavatory counter top. For compliance with ADA Accessibility Guidelines, unit should be installed so that bottom edge of reflecting surface is no higher than 40" (1016mm) maximum AFF. Note that bottom edge of door is 3/4" (19mm) below RWO.

Rough Wall Opening (RWO) required is..... 16"W x 22-3/4"H x 3-1/2"D (406mm x 578mm x 89mm).

OPERATION

User pulls door to access contents and manually pushes door shut. Shelf spacings may be adjusted using internally embossed clip tracks.

OPTIONS AVAILABLE

Cabinet can be inverted to change left hand swing (shown) to right hand swing as required at installation site.

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS INC.