




AMERICAN SPECIALTIES, INC.
 441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No: 105
 ISSUED: 2-87
 REVISED: 9-96

SURFACE MOUNTED SECURITY FRAMED MIRROR

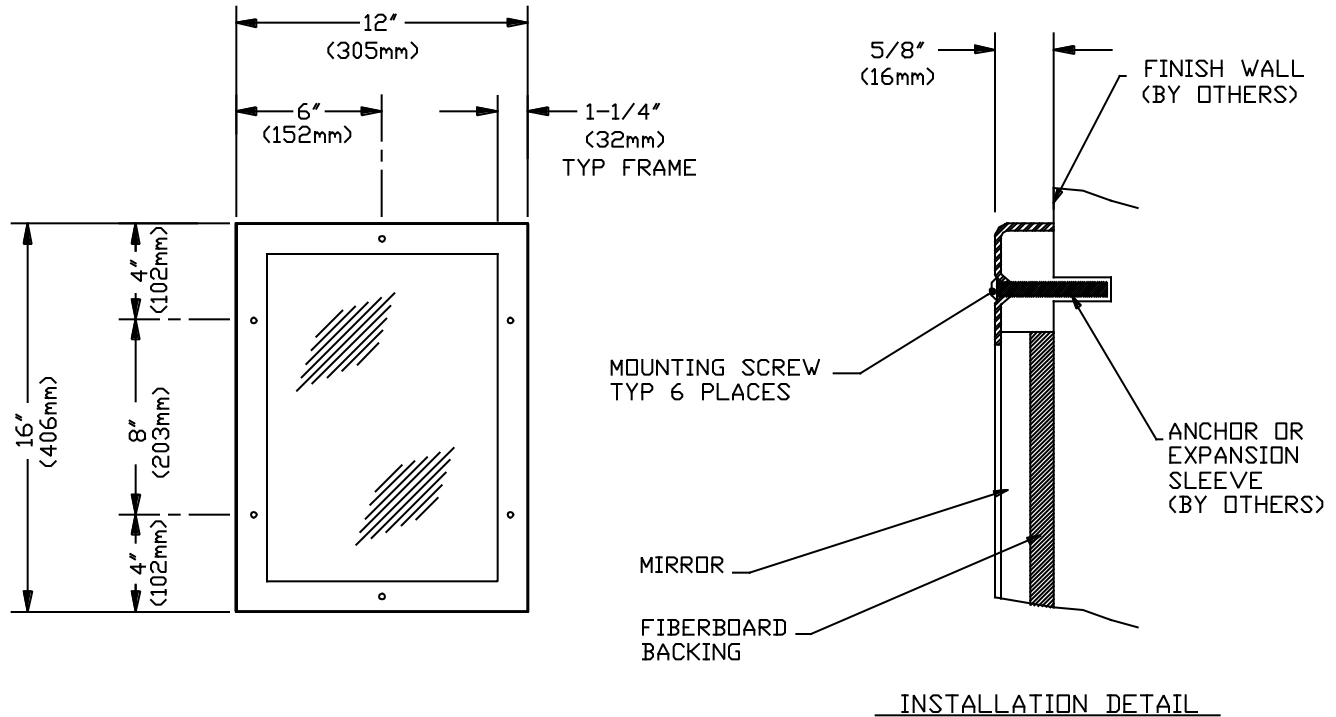

INSTALLATION DETAIL

SPECIFICATION

Surface Mounted Security Framed Mirror shall have frame fabricated of alloy 18-8 stainless steel, type 304, N^o14 gauge. Structural assembly of frame components shall be of welded construction with six (6) mounting holes. All exposed surfaces shall be N^o 4 satin finish and be protected during shipment with a PVC film easily removable after installation. Mirror construction will be as specified in the Glazing Options chart, and unit will be provided with fiberboard backing.

Surface Mounted Security Framed Mirror shall be Model N^o 105-xx as fabricated by American Specialties, Inc. 441 Saw Mill River Road Yonkers, New York 10701-4913

INSTALLATION

Unit is surface mounted to wall or partition using six (6) 1/4 - 20 x 2" long Torx Head machine screws (supplied) into suitable anchors (by others) or alternate wall preparation (by others). For compliance with ADA Accessibility Guidelines, bottom edge of reflecting surface should be no higher than 40" (1016mm) maximum above finished floor (AFF).

GLAZING OPTIONS

Specify glazing option from chart below by adding code suffix to model number (i.e. 105-14).

Suffix	Material	Finish	Image Quality
14	20 gauge type 304 stainless steel	N ^o 8 mirror polish	excellent
30	20 gauge type 430 stainless steel	bright annealed	good
31	22 gauge steel	chrome plated	excellent
13	1/4" thick tempered glass	polished mirror	excellent
17	1/4" thick Plexiglas	polished mirror	excellent

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS INC.