



AMERICAN SPECIALTIES, INC.


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No: 9469

ISSUED: 1-87

REVISED: 6-99

PROFILE COLLECTION RECESSED PAPER TOWEL DISPENSER AND WASTE RECEPTACLE

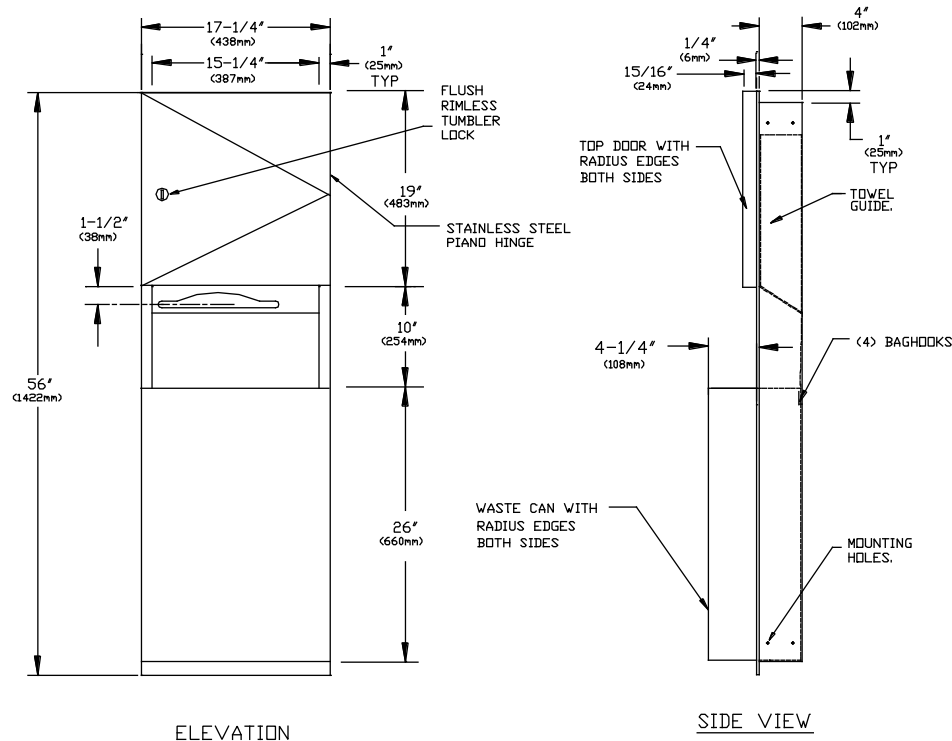

SPECIFICATION

Profile Collection Recessed Paper Towel Dispenser and Waste Receptacle shall hold and dispense 800 standard multi-fold or 600 standard C-fold paper towels and shall have a waste capacity of 1.95 cu. ft. (14.5 gal.). Cabinet, waste receptacle and door shall be fabricated of 18-8 stainless steel, type 304. Full face door shall be 16 gauge (1.5mm) and shall be free of miters, visible welding or open seams with 15/16" (24mm) square horizontal returns to wall and shall have 3/4" (19mm) rounded vertical edges. All four corners are welded and ground smooth with no open miters. Door shall be attached to cabinet frame with a full length 3/16" (5mm) dia. heavy duty stainless steel multi-staked piano hinge and shall be held closed with a flush rimless tumbler lock keyed alike to other ASI washroom equipment. Towel dispensing slot shall have a fully deburred edge for snag-free dispensing and user safety. Waste receptacle shall be 16 gauge (1.5mm) with hemmed edges and shall have 3/4" (19mm) rounded vertical edges to match door above and shall be fastened to cabinet with tamper resistant screws. Cabinet shall be 20 gauge (.9mm) with one-piece face trim construction 1" (25mm) wide with no miters or exposed welding and 1/4" (6.4mm) square returns to wall. Structural assembly of body and door components shall be of welded construction. All exposed surfaces shall have a N° 4 satin finish.

Profile Collection Recessed Paper Towel Dispenser and Waste Receptacle shall be Model N° 9469 as manufactured by American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701- 4913

INSTALLATION

Unit is mounted in wall recess using four (4) N°10 self tapping screws (supplied) through concealed mounting holes provided. For compliance with ADA Accessibility Guidelines, unit should be installed so that towel dispenser slot is 54" (1372mm) maximum above finished floor (AFF) if clear floor side reach access is provided or 48" (1219mm) maximum AFF if clear floor forward reach access only is provided. Note that top of RWO is 3/4" (19mm) below top of unit.

Rough Wall Opening (RWO) required is.... 15-3/4"W x 54-1/2"H x 4-1/4"D (400mm x 1384mm x 108mm)

OPERATION

Towels are self feeding by user extracting same to dry hands and face until supply is depleted. Waste receptacle is emptied manually on cycle determined by maintenance needs.

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS INC.